


3 PLY 90# COTTON POLYESTER HOT STOCK & WATER x FRICTION

CODE NUMBER: 5451

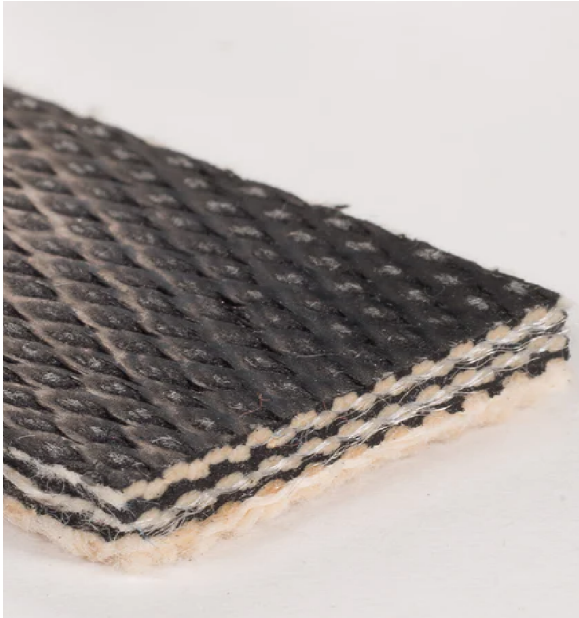

TECHNICAL DATA

Color	Black
Compound	SBR
Plies	3
Fabric/Carcass	Poly/Cotton
Cover Surface	Silver Hard Duck
Bottom Surface	Friction
Working Strength	90#
Overall Gauge	.145"
Weight PIW	.059
Minimum Pulley	4"
Temp Range ° F	20° - 250° F
FDA/USDA	No
Anti-Static	No
Recommended Splice	Clipper, RS125, Alligator, Endless
Maximum Width	72"

Feature/Benefits:

Designed for use where higher product temps are required and/or good release is needed. Used primarily in tire plants, this belt is also used in applications with uncured rubber and other sticky products.

PLANT 1: 21611 W SR 51 Genoa, OH 43430
PLANT 2: 504 E. Front St. Pemberville, OH 43450
SALES & SUPPORT: (419) 287-7092
FAX: (419) 691-7688
SALES & SUPPORT EMAIL: info@nbeltingss.com

N **NATIONWIDE
BELTING SALES
AND SERVICES**