


# 1 PLY 135# POLYESTER GREEN NEEDLED NITRILE FRICTION x FRICTION .240 THICK

CODE NUMBER: 8746

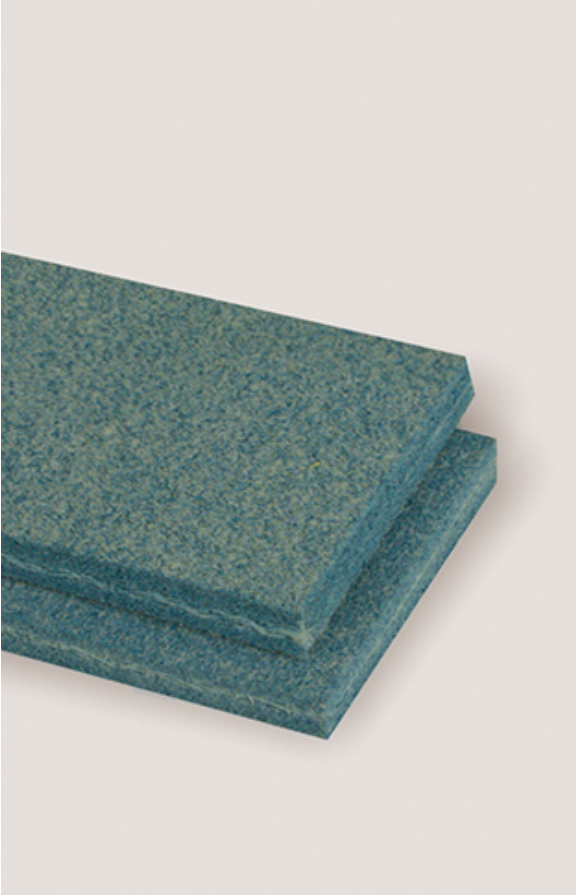

TECHNICAL DATA	
Color	Green
Compound	Polyester
Plies	1
Fabric/Carcass	Polyester
Cover Surface	Impregnated Polyester
Bottom Surface	Impregnated Polyester
Working Strength	135#
Overall Gauge	.22"
Weight PIW	.0237
Minimum Pulley	4"
Temp Range ° F	-4° - 248° F
FDA/USDA	No
Anti-Static	No
Recommended Splice	Finger
Maximum Width	78"

#### Feature/Benefits:

Wear and cut resistant, soft impact surface, high temperature resistant, quiet running. Abrasion resistant, accumulation, airports, distribution centers, diverting, general conveying, horticultural, industrial, material handling, metal parts, mineral oil, nuts and seeds, packaging, troughed applications, turn applications.

PLANT 1: 21611 W SR 51 Genoa, OH 43430  
PLANT 2: 504 E. Front St. Pemberville, OH 43450  
SALES & SUPPORT: (419) 287-7092  
FAX: (419) 691-7688  
SALES & SUPPORT EMAIL: [info@nbeltingss.com](mailto:info@nbeltingss.com)

**N**ATIONWIDE  
BELTING SALES  
AND SERVICES