


# 3 PLY 90# COTTON POLYESTER WHITE SILICONE HOT STOCK & WATER x FRICTION

CODE NUMBER: 9962

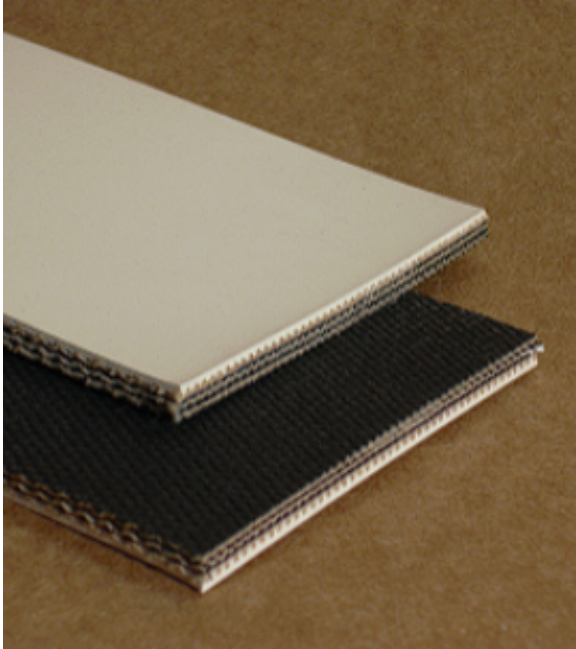

## TECHNICAL DATA

Color	White
Compound	Silicone/SBR
Plies	3
Fabric/Carcass	Cotton/Polyester
Cover Surface	Smooth Silicone
Bottom Surface	Friction Surface
Working Strength	90#
Overall Gauge	.180"
Weight PIW	.08
Minimum Pulley	3"
Temp Range ° F	-40° - 250° F
FDA/USDA	No
Anti-Static	No
Recommended Splice	Step Splice, Lacing
Maximum Width	72"

### Feature/Benefits:

Features a silicone cover that will withstand a wide range of temps while retaining good release characteristics. Cover can withstand -100° F to 500° F. Popular in the tire and rubber plants. Excellent belt for the tread extruder and cementing line.

PLANT 1: 21611 W SR 51 Genoa, OH 43430  
PLANT 2: 504 E. Front St. Pemberville, OH 43450  
SALES & SUPPORT: (419) 287-7092  
FAX: (419) 691-7688  
SALES & SUPPORT EMAIL: [info@nbeltingss.com](mailto:info@nbeltingss.com)

**N**ATIONWIDE  
BELTING SALES  
AND SERVICES