


1 PLY 250# PVC INTERWOVEN BLACK COVER X COVER FR/SC

CODE NUMBER: 3449

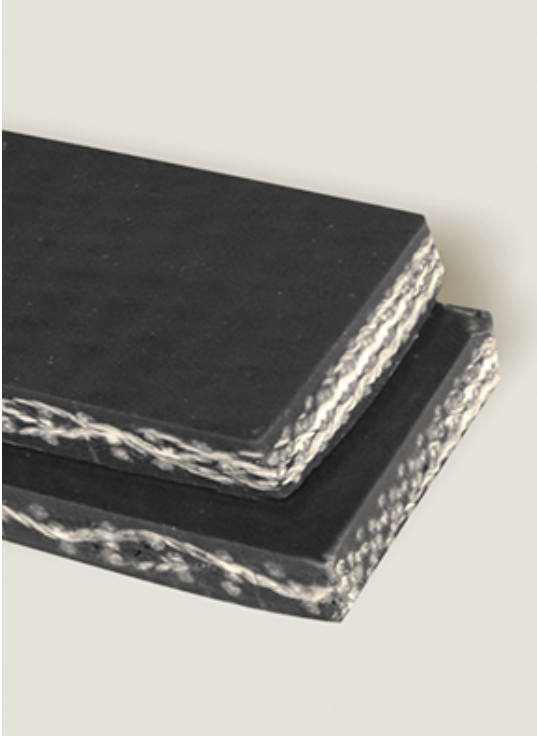

TECHNICAL DATA

Color	Black
Compound	PVC
Plies	1
Fabric/Carcass	Spun Polyester
Cover Surface	PVC Glossy
Bottom Surface	PVC Matte
Working Strength	250#
Overall Gauge	.244"
Weight PIW	1.45
Minimum Pulley	6"
Temp Range ° F	0° - 180° F
FDA/USDA	No
Anti-Static	No
Recommended Splice	#27 Alligator, RS187 Staple
Maximum Width	72"

Feature/Benefits:

Commonly used in the feed and grain industries for elevator belting. Oil resistant, fire retardant and static conductive qualities. This belt has high bolt retention for bucket attachments, moisture resistant and will not mildew or rot, and is MSHA approved.

PLANT 1: 21611 W SR 51 Genoa, OH 43430
PLANT 2: 504 E. Front St. Pemberville, OH 43450
SALES & SUPPORT: (419) 287-7092
FAX: (419) 691-7688
SALES & SUPPORT EMAIL: info@nbeltingss.com

NATIONWIDE
BELTING SALES
AND SERVICES