


2 PLY 185# CONTINUOUS CHEVRON X BARE

CODE NUMBER: 9983

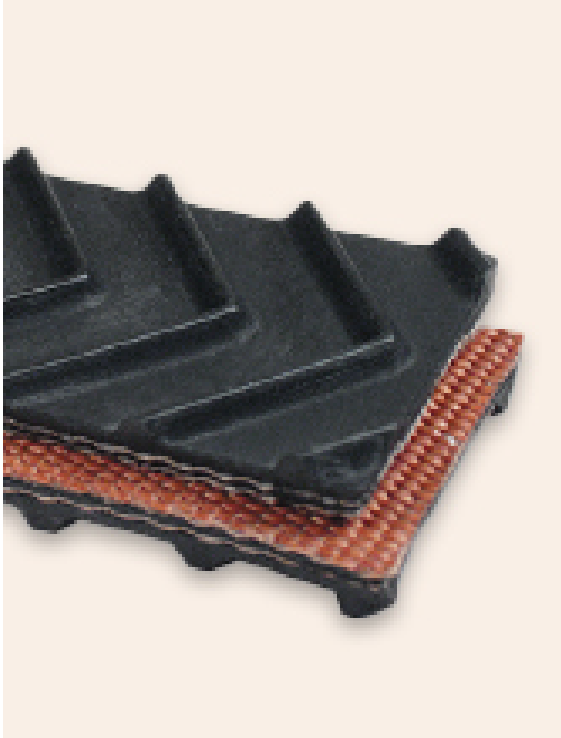

TECHNICAL DATA

Color	Black
Compound	SBR Blend
Plies	2
Fabric/Carcass	Polyester/Nylon
Cover Surface	Chevron
Bottom Surface	Bare
Working Strength	185#
Overall Gauge	.141"
Weight PIW	.115"
Minimum Pulley	4"
Temp Range ° F	-40° - 350° F
FDA/USDA	No
Anti-Static	No
Recommended Splice	Vulcanized Step Splice, Mechanical Fasteners
Maximum Width	72"

Feature/Benefits:

Versatile belt with great flexibility and low temperature rating. Used for applications such as conveying sand, grain, coal, or sand/silica. Also popular for railroad car unloading and tubeveyor applications.

PLANT 1: 21611 W SR 51 Genoa, OH 43430
PLANT 2: 504 E. Front St. Pemberville, OH 43450
SALES & SUPPORT: (419) 287-7092
FAX: (419) 691-7688
SALES & SUPPORT EMAIL: info@nbeltingss.com

NATIONWIDE
BELTING SALES
AND SERVICES